



HIGH TEMPERATURE WIRE

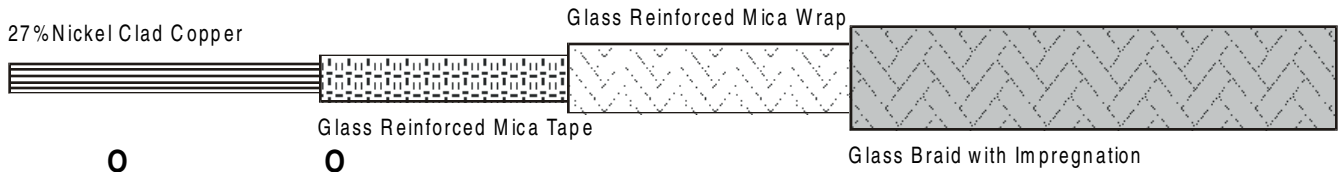

450 °C / 850 °F MGT


PART#	AWG	STRANDS	OD (in)	WEIGHT (1000 ft)
MGT-6	6AWG	133	.308	115
MGT-8	8AWG	133	.265	76
MGT-10	10AWG	105	.212	50
MGT-12	12AWG	65	.161	31
MGT-14	14AWG	41	.142	23
MGT-16	16AWG	26	.127	16
MGT-18	18AWG	16	.114	12
MGT-20	20AWG	10	.104	10

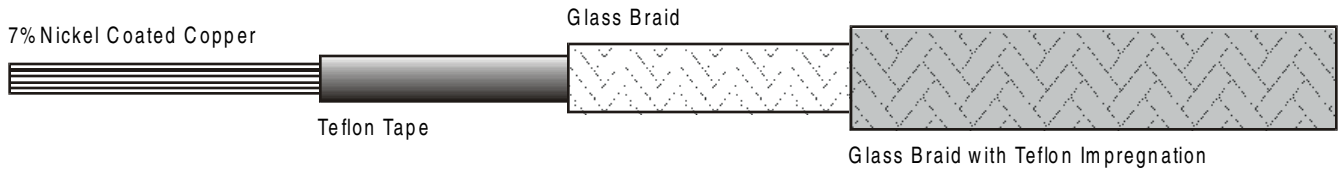

250 °C / 482 °F TGGT

PART#	AWG	STRANDS	OD (in)	WEIGHT (1000 ft)
TGGT-6	6AWG	133	.301	125
TGGT-8	8AWG	133	.229	72
TGGT-10	10AWG	105	.178	48
TGGT-12	12AWG	65	.153	32
TGGT-14	14AWG	41	.134	23
TGGT-16	16AWG	26	.120	17
TGGT-18	18AWG	16	.109	13
TGGT-20	20AWG	10	.099	10


SILICONE SUPERFLEX WIRE

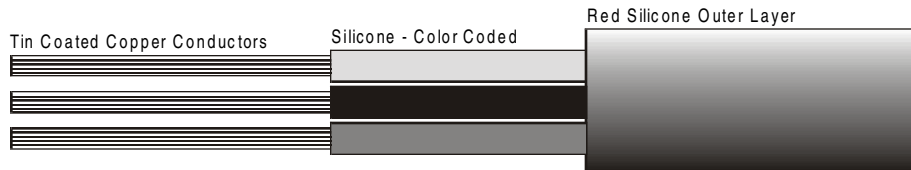

180°C / 355°F SiHF - 500V

PART#	AWG	CONDUCTORS	OD (in)	WEIGHT (1000 ft)
SIHF-18/3	18AWG	3	.268	43
SIHF-18/4	18AWG	4	.307	56
SIHF-16/3	16AWG	3	.335	66
SIHF-16/4	16AWG	4	.374	82
SIHF-14/3	14AWG	3	.386	102
SIHF-14/4	14AWG	4	.437	127
SIHF-12/3	12AWG	3	.449	151
SIHF-12/4	12AWG	4	.504	198

CERAMIC TERMINAL COVERS

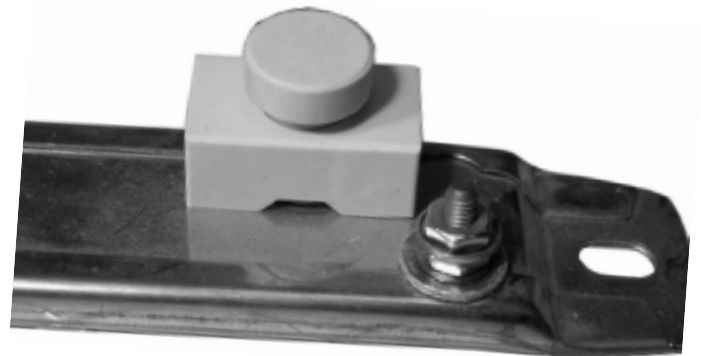

ROUND STYLE

PART#	STUD
CC10-32	10-32
CC10-24	10-24

BOX STYLE

PART#	STUD
CC10-32-BOX	10-32
CC10-24-BOX	10-24